

# 新乡市弘力电源科技有限公司

## 圆柱形锂离子可充电电池

### 产品规格书

XINXIANG HONGLI SUPPLY SOURCE TECHNOLOGY CO., LTD

## SPECIFICATIONS

### CYLINDRICAL LITHIUM-ION RECHARGEABLE BATTERY

型 号 MODEL : IMR18650-1200mAh

客户名称 CUSTOMER:

客户确认 CONFIRMATION:

日 期 DATE : 2021-11-17

制定 PRERARED	审核 CHECKED	批准 APPROVED
杨世青 Yangshiqing	李永起 Liyongqi	申长伟 Shenchangwei

地址：新乡县新乡经济开发区兴隆路西段

ADD: Xinglong West Road , Xinxiang Economic Development Zone, Xinxiang County. China

电话 Tel: 0086-373-5632158

传真 Fax: 0086-373-5632168

## 目录 Content

1.适用范围 Scope.....	2
2.型号 Model.....	2
3.尺寸 Dimensions.....	2
4.规格 Specifications.....	3
5.电池性能 Battery Performanc.....	4
6.外观检查 Visual Inspection.....	7
7.标准测试环境 Standard Environment .....	7
8.储存及其它事项 Storage and Others.....	7
9.保质期及产品责任 Warranty period & Product liability.....	7
10.电池使用时警告事项及注意事项 Warnings and Cautions in using the battery.....	7

IMR18650-1200mAh 产品规格书  
SPECIFICATIONS FOR IMR18650-1200mAh


1.适用范围 Scope

本产品规格书描述了新乡市弘力电源科技有限公司（以下简称弘力公司）生产的圆柱锂离子电池的产品性能指标。

The document describes the product specification of the cylindrical lithium-ion rechargeable battery cell supplied by Xinxiang Hongli supply source technology co., LTD (Hereinafter referred to as Hongli company)

2.型号 Model: IMR18650-1200mAh

3.包装尺寸:

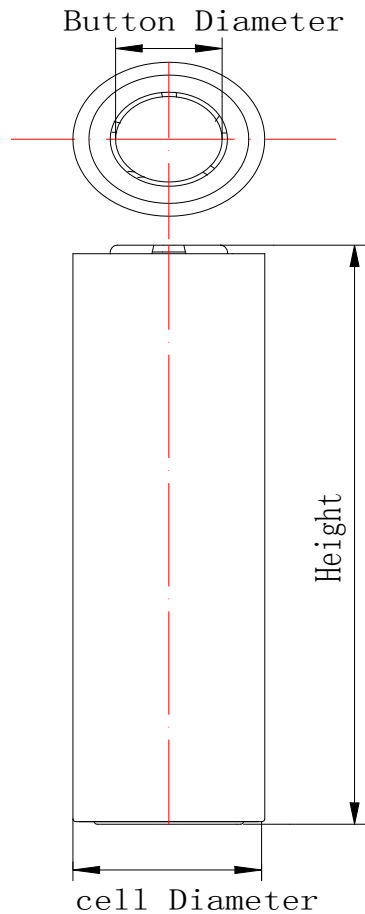

Cell diameter(电池直径)	Cell Height(电池高度)	Button diameter(盖帽直径)
mm	mm	mm
18.2±0.3	65.0±0.5	7.5±0.3(平)
18.2±0.3	67.3±0.5	6.0±0.3(尖)

IMR18650-1200mAh 产品规格书  
SPECIFICATIONS FOR IMR18650-1200mAh

**4.规格**

序NO.	项目 Item	规格 Specification					
1.	标称容量 Nominal capacity	1200mAh@ 0.2C (240mA) 放电discharge					
2.	最小容量 Minimal capacity	1160mAh@ 0.5C(600mA)放电 discharge					
3.	标称电压 Nominal voltage	3.7V					
4.	内阻 Impedance	≤60m Ω (充电态)					
5.	充电截止电压 Charge cut-off voltage	4.2 V					
6.	充电电流 Charge current	标准充电: 0.2C <sub>5</sub> A      Standard charge: 0.2C <sub>5</sub> A 快速充电: 0.5C <sub>5</sub> A      Rapid charge: 0.5C <sub>5</sub> A					
7.	标准充电方法 Standard Charging method	0.2C <sub>5</sub> A 恒流 (CC) 充电至 4.2V, 再恒压 4.2V (CV) 充电直至充电电流≤0.02C <sub>5</sub> A 0.2C <sub>5</sub> A constant current (CC) charge to 4.2V, then consrant voltage 4.2V (CV) charge till charge current decline to ≤ 0.02C <sub>5</sub> A					
8.	充电时间 Charging time	标准充电: 7.5 h (参考值) Standard charge: 7.5 h (reference) 快速充电: 3.5 h (参考值) Rapid charge: 3.5 h (reference)					
9.	最大充电电流 Max.charge current	600mA					
10.	最大持续放电流 Max. Continous discharge current	600mA					
11.	放电截至电压 Discharge cut-off voltage	3.0 V					
12.	工作温度 Operating temperature	充电Charge: 0°C ~ 45°C 放电Discharge: -10°C ~ 60°C					
13.	储存温度 Storage temperature	-10°C ~ 45°C					
14.	储存湿度 Storage humidity	≤85%RH					
15.	电池重量 Cell Weight	约Approx: 36g					
16.	容量保持	搁置时间					
		容量保持率					
		1个月	2个月	3个月	6个月	9个月	12个月
		92%	91%	90%	86%	83%	80%

IMR18650-1200mAh 产品规格书  
SPECIFICATIONS FOR IMR18650-1200mAh

5. 电池性能 Battery Performance

5.1 电性能 Electrical characteristics

序号 NO.	项目 Item	标准 Requirements	测试方法 Test Method
1	常温放电性能 Discharge Characteristics	A) $0.2C_5A \geq 5h$ B) $0.5C_5A \geq 116min$ C) $1C_5A \geq 54min$	在 1 标准大气压, 环境温度 $20^{\circ}C \pm 5^{\circ}C$ , 相对湿度为 45%~75% 的条件下, 电池标准充电后 (以下若没有特别说明, 均在此条件下放置, 皆按此充电方式), 搁置 30min, 分别以 $0.2C_5A$ 、 $0.5C_5A$ 、 $1C_5A$ 、进行放电至终止电压, 循环三次, 当有一次达到标准, 即达到标准要求 (下同)。 Standard charged under the condition of normal atmospheric pressure and the environmental temperature of $20^{\circ}C \pm 5^{\circ}C$ and 45%~75%RH, then rest for 30min and discharge at $0.2C_5A$ 、 $0.5C_5A$ 、 $1C_5A$ to the discharge cut-off voltage respectively. Charge/discharge cycle can be conducted for 3 times before meeting the Standards (the same below)
2	常温荷电保持能力 Norm Storage	放电时间 $\geq 4.25h$ Discharge Time $\geq 4.25h$	在 1 标准大气压, 环境温度 $20^{\circ}C \pm 5^{\circ}C$ , 电池标准充电后, 开路放置 28 天, 再以 $0.2C_5A$ 放电至终止电压。 Standard charged under the condition of normal atmospheric pressure and the environmental temperature of $20^{\circ}C \pm 5^{\circ}C$ , Store for 28 days after standard charged, then discharge at $0.2C_5A$ to the discharge cut-off voltage.
3	循环寿命 Cycle Life	$C_{discharge} \geq 150$ times	在 1 标准大气压, 环境温度 $20^{\circ}C \pm 5^{\circ}C$ , 相对湿度为 45%~75% 的条件下, 电池标准充电后 (搁置 30min, 分别以 $0.5C_5A$ 进行放电至终止电压放电至标称容量 80% 循环次数 Standard charged under the condition of normal atmospheric pressure and the environmental temperature of $20^{\circ}C \pm 5^{\circ}C$ and 45%~75%RH, then rest for 30min and discharge at $0.5C_5A$ to the discharge cut-off voltage respectively. Nominal capacity get 80% cycle times.
4	出货电压 Cell Voltage	出货状态 As of shipment	3.85V-4.05V

## 5.2 环境适应性能 Adaptation to Environment Characteristic

序NO.	项目 Item	标准 Standard	测试方法 Test Method
1	热循环性能 Thermal Cycle	电池不漏液、不冒烟、 不起火、不爆炸 No smoking、No fire No explosion、No leakage	电池标准充电后，在环境温度为 $75\pm 2^{\circ}\text{C}$ 的条件下开路放置 48h，在 $-20^{\circ}\text{C}$ 条件下开路放置 6h，然后在室温条件下开路放置 24h， $1\text{C}_5\text{A}$ 进行放电至终止电压。  Standard charge the battery, then store it at $75\pm 2^{\circ}\text{C}$ for 48h, then $-20^{\circ}\text{C}$ for 6h and room temperature for 24h. Then discharge at $1\text{C}_5\text{A}$ to discharge cut-off voltage.
2	恒定湿热性能 Static Humidity	电池不起火、不爆炸 放电时间 $\geq 36\text{min}$  Discharge Time $\geq 36\text{min}$  No explosion No fire	电池标准充电后，置于温度为 $40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ ，相对湿度为 90% 的恒温恒湿箱中，搁置 48h 后，取出电池 $20\pm 5^{\circ}\text{C}$ 环境下搁置 2h。观察电池外观变化。然后以 $1\text{C}_5\text{A}$ 放电至终止电压。  Standard charge. Put the battery into a $40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ and 90% RH chamber for 48h, then get it out and store it for 2h at room temperature. Observe the variation of the battery's appearance and then discharge at $1\text{C}_5\text{A}$ to discharge cut-off voltage, measuring final capacity.
3	跌落性能 Drop	不起火、不爆炸 放电时间 $\geq 51\text{min}$ No fire、No explosion Discharge time $\geq 51\text{min}$	标准充电后，将电池样品由高度(最低点高度)为 1m 的位置自由跌落到 18~20mm 的硬木板上，要求各面各跌落一次。然后将电池以 $1\text{C}_5\text{A}$ 放电至终止电压，做 1C/1C 循环达到要求停止，充放电循环次数不高于 3 次  Standard charge. Then let it self fall off from a height of 1.0m(the lowest height) to a smooth wooden surface. The self fall off should be conducted from every positive and negative direction. then discharge at $1\text{C}_5\text{A}$ to discharge cut-off voltage. Conduct 1 $\text{C}_5\text{A}$ / 1 $\text{C}_5\text{A}$ cycle for 3 times.
4	不同温度下的 放电性能 High-low Temperature Discharge	电池不爆炸、不起火。 No fire\explosion  A) $55^{\circ}\text{C} \geq 90\%$ B) $0^{\circ}\text{C} \geq 80\%$ ; C) $-10^{\circ}\text{C} \geq 60\%$	电池标准充电后，在 $55\pm 2^{\circ}\text{C}$ 条件下恒温搁置 3h、以 $0.2\text{C}_5\text{A}$ 放电至终止电压，然后在室温条件下标准充电，依次按照 $0\pm 2^{\circ}\text{C}$ / $-10\pm 2^{\circ}\text{C}$ 的顺序在相应的恒温条件下搁置 20h，以 $0.2\text{C}_5\text{A}$ 放电至终止电压。  Standard charge. Then store for 3h at $55\pm 2^{\circ}\text{C}$ and

IMR18650-1200mAh 产品规格书  
SPECIFICATIONS FOR IMR18650-1200mAh

			discharge at 0.2C <sub>5</sub> A to discharge cut-off voltage. then standard charge at room temperature and store for 20h according to the order of 0±2 °C /-10±2 °C and discharge at 0.2C <sub>5</sub> A measuring corresponding discharge capacity.
5	振动环境 适应性能 Vibration	<p>电池外观无明显损伤、不漏液、不冒烟、不爆炸</p> <p>No remarkable damage、No smoking No explosion No leakage</p>	<p>电池标准充电后，安装在振动台面上，按下面的振动频率和对应的振幅调整好试验设备,X、Y、Z 三个方向每个方向上从 10Hz~55Hz 循环扫频振动 30min，扫频速率为 1oct/min:</p> <p>A)振动频率：10Hz~30Hz 位移幅值（单振幅）：0.38mm</p> <p>B)振动频率：30Hz~55Hz 位移幅值（单振幅）：0.19mm。</p> <p>Standard charge. Measure initial status. Equip it to the vibration platform, adjust and prepare the test equipment according to following vibration frequency and relevant swing, doing frequency sweeping from X, Y, Z three directions, each from 10Hz to 55Hz for 30 minutes of recycling, rating of which is 1oct/min:</p> <p>A)vibration frequency:10Hz~30Hz Displacement breadth (single swing): 0.38mm</p> <p>B) vibration frequency: 30Hz~55Hz Displacemen tbreadth(single swing): 0.19mm。</p> <p>Measure final status after sweeping and Observe the variation of the battery's appearance.</p>
6	高温热冲击 测试 Thermal exposure test	<p>不起火、不爆炸</p> <p>No fire, no explosion</p>	<p>测量电池的初始状态，电池标准充电后，放置于热箱中，并与热电偶相连，温度以（5 °C ± 2 °C）/min 的速率升至 100 °C ± 2 °C 并保温 10Min。观察电池外观变化。</p> <p>Measure the initial state of the battery, after standard charging, place it in a hot box, , And connected to a thermocouple, the temperature rises at a rate of (5 °C ± 2 °C)/min 100 °C ± 2 °C and insulation for 10 minutes. Observing changes in battery appearance</p>

IMR18650-1200mAh 产品规格书  
SPECIFICATIONS FOR IMR18650-1200mAh

7	<p>常温短路测试 Room temperature short circuit test</p>	<p>不爆炸、不起火、 最高温度&lt;130℃ No explosion, no fire</p> <p>Maximum temperature&lt;130 °C</p>	<p>电池标准充电后，测量电池的初始状态，置于防爆玻璃罩中直接短路其正负极（线路总电阻不大于50mΩ），当电池温度下降到比峰值约低 10 °C 时试验结束观察电池的温度及外观变化。 After standard charging of the battery, measure the initial state of the battery and place it in explosion-proof glass Short circuit its positive and negative poles directly in the cover (the total resistance of the circuit is not greater than 50m Ω), when The test ends when the battery temperature drops to about 10 °C below the peak value. Observing electricity The temperature and appearance changes of the pool.</p>
8	<p>高温短路测试 High temperature short circuit test</p>	<p>不爆炸、不起火、 最高温度&lt;130℃ No explosion, no fire</p> <p>Maximum temperature&lt;130 °C</p>	<p>电池充电后，测量电池的初始状态，置于 60±2℃ 防爆箱，中，放置 3h 后直接短路其正负极（线路总电阻不大于（50mΩ），试验过程监视电池温度变化，当电池温度下降，到比峰值约低 10 °C 时，结束试验。观察电池的温度及 外观变化。 After charging the battery, measure the initial state of the battery and place it in a 60 ± 2 °C explosion-proof box. After 3 hours of storage, short-circuit its positive and negative poles directly (the total resistance of the circuit is not greater than (50m Ω). Monitor the temperature change of the battery during the test. When the battery temperature drops to about 10 °C lower than the peak value, the test ends. Observe the temperature and appearance changes of the battery.</p>
9	<p>重物冲击 Heavy object impact</p>	<p>不起火、不爆炸 No fire, no explosion</p>	<p>电池标准充电后，测量电池的初始状态，放在平面上，并与热电偶相连，将一直径为 15.8mm 的棒放在电池高度方向中间位置，让重量 9.1kg 的重物从 610mm 高度自由垂落至冲击台面，观察电池外观及温度变化。 After standard charging of the battery, measure the initial state of the battery, place it on a flat surface, and connect it to a thermocouple. Place a rod with a diameter of 15.8mm in the middle of the height direction of the battery, allowing a weight of 9.1kg to freely fall from a height of 610mm to the impact table, and observe the appearance and temperature changes of the</p>



IMR18650-1200mAh 产品规格书  
SPECIFICATIONS FOR IMR18650-1200mAh

			battery.
10	压缩安全 Compression security	不起火、不爆炸、 最高温度<130℃。 No fire, no explosion  The maximum temperature is<130℃.	测量电池的初始状态，电池标准充电后，与热电偶相连，放置于两铁制平面模具中，用 13KN 的最大力压力进行瞬间压缩，观察电池的温度及外观变化。 Measure the initial state of the battery, connect it to a thermocouple after standard charging, and place it in two iron flat molds. Apply a maximum force of 13KN for instant compression, and observe the temperature and appearance changes of the battery.
11	热冲击 Thermal shock	不起火、不爆炸 No fire, no explosion	测量电池的初始状态，电池标准充电后，放置于热箱中，并与热电偶相连，温度以 (5℃±2℃)/min 的速率升至 100℃±2℃并保温 10Min。观察电池外观变化。 Measure the initial state of the battery, after standard charging, place it in a hot box and connect it to a thermocouple. The temperature rises at a rate of (5℃±2℃)/min to 100℃±2℃ and is kept warm for 10 minutes. Observing changes in battery appearance
12	过放电测试 Overdischarge test	不起火、不爆炸 No fire, no explosion	将电芯放完电，再用 1C 反接充电 90 分钟 A discharged cell is subjected to a reverse charge at 1C for 90 min.
13	过充电测试 Overcharge test	不爆炸、不起火、 最高温度<130℃ No fire, no explosion  The maximum temperature is<130℃.	电芯标准充满电后，以 4.6V 的恒定电压继续充电，保持 8 小时 After standard charge, continue to charge with a constant voltage 4.6V per a cell, holding 8h.

IMR18650-1200mAh 产品规格书  
SPECIFICATIONS FOR IMR18650-1200mAh

备注：以上标准中的一些术语的定义：

Comments: The definitions of some nomenclatures of this specification.

- (1) 标准充电：在环境温度  $20^{\circ}\text{C} \pm 5^{\circ}\text{C}$  的条件下，以  $0.5C_5A$  充电，当电池端电压达到充电限制电压  $4.2V$  时，改为恒压充电，直到充电电流小于或等于  $0.02C_5A$  后停止充电  
standard charge: Charge with current  $0.5C_5A$  to limit charge voltage  $4.2V$  under the condition of  $20^{\circ}\text{C} \pm 5^{\circ}\text{C}$  surrounding temperature, then change to charge with constant voltage till the current less than or equal to  $0.02C_5A$ .
- (2) 剩余容量：电池经过特定的检测程序后的首次放电容量。  
Residual Capacity: The first discharge capacity after being tested by the specific procedure.
- (3) 标准循环：电池  $0.5C$  标准充电后，搁置  $10\text{min}$ ，以  $0.5C_5A$  放电至  $3.0V$   
Standard Cycle: After standard charge at  $0.5C$ , rest for  $10\text{min}$ , then discharge at  $0.5C_5A$  to  $3.0V$ .
- (4) 恢复容量：电池经过特定的检测程序后，通过反复充放电使状态恢复后的放电容量。  
Recovery Capacity: The discharge capacity by implementing charge-discharge cycle repeatedly after being tested by the specific procedure.
- (5) 用于上述测试的电池必须是交货一个月内的电池，除非另有规定。  
Test should be conducted with new batteries within one month after shipment from our factory, Unless otherwise defined.

## 6.外观检查 Visual Inspection

不允许有任何影响电池性能的外观缺陷，如裂纹、裂缝、泄漏等。

There shall be no such defect as scratch, flaw, crack, and leakage, which may adversely affect commercial value of the cell.

## 7.标准测试环境 Standard environmental test condition

除非特别说明，本规格书中所有测试均在以下环境条件下进行：

Unless otherwise specified, all tests stated in this Product Specification are conducted at below condition:

温度： $20 \pm 5^{\circ}\text{C}$                       Temperature:  $20 \pm 5^{\circ}\text{C}$   
湿度： $25-85\% \text{RH}$                       Humidity:  $25-85\% \text{RH}$   
大气压： $86\text{KPa} \sim 106 \text{kPa}$               Atmosphere:  $86\text{KPa} \sim 106 \text{kPa}$

## 8.储存及其它事项 Storage and Others

### 8.1 长期储存 Long Time Storage

长期储存的电池（超过3个月）须置于干燥、凉爽处。每6个月对电池进行一次充放电，储存电压为 $3.6 \sim 3.9V$ 且储存环境要求如7。

If the cell is stored for a long time(exceed three months), the cell should be stored in drying and cooling place. The cell should be charged and discharged every six month. The cell's storage voltage should be  $3.6 \sim 3.9V$  and the cell is to be stored in a condition as NO.7.

### 8.2 其它事项 Others

任何本规格书中未提及的事项，须经双方协商确定。

Any matters that this specification does not cover should be consulted between the customer and HONGLI.

## 9. 保质期及产品责任 Warranty Period& Product Liability

保质期是从出厂日期（喷码）开始起 6 个月

IMR18650-1200mAh 产品规格书  
SPECIFICATIONS FOR IMR18650-1200mAh

Warranty period of this product is 6 months from manufacturing code.

弘力公司对因没有按本规格书规定操作而导致的意外不负责任，当本规格书有一些变动时，弘力公司会通知购买方。

HONGLI company is not responsible for the troubles caused by mishandling of the battery which is clearly against the instructions in this specification. When HONGLI company find any new facts which require modification of this document, we will inform the buyer.

## 10. 电池使用时警告事项及注意事项 Warnings and Cautions in using the battery

为防止电池可能发生泄漏,发热、爆炸,请注意以下预防措施:

To prevent the possibility of the battery from leaking, heating or explosion please observe the following precautions:

### 警告 ! WARNINGS!

- 使用规定的充电器
- Use the battery charger specifically for that purpose when recharging
- 不要将电池投入火中或加热
- Do not discard the battery in fire or a heater.
- 不要将电池分解拆散
- Do not dismantle the battery
- 严禁将电池浸入海水或水中,保存不用时,应放置于阴凉干燥的环境中.
- Do not immerse the battery in water or seawater, and keep the battery in a cool dry surrounding if it stands by.
- 禁止将电池在热高温源旁,如火、加热器等使用和留置.
- Do not use or leave the battery near a heat source as fire or heater.
- 充电时请选用锂离子电池专用充电器.
- Please choose lithium-ion battery charger when charging.
- 严禁颠倒正负极使用电池.
- Do not reverse the position and negative terminals.
- 严禁将电池直接插入电源插座.
- Do not connect the battery to an electrical outlet.
- 禁止用金属直接连接电池正负极短路.
- Do not short-circuit the battery by directly connecting the positive and negative terminals with metal objects.
- 禁止将电池与金属,如发夹、项链等一起运输或贮存.
- Do not transport or store the battery together with metal objects such as hairpins, necklaces, etc.
- 禁止敲击或抛掷、踩踏电池等.
- Do not strike, trample or throw the battery.
- 禁止直接焊接电池和用钉子或其它利器刺穿电池.
- Do not directly solder the battery and pierce the battery with a nail or other sharp objects.

### 小心 ! CAUTIONS!

- 禁止在高温下(炙热的阳光下或很热的汽车中)使用或放置电池,否则可能会引起电池过热、起火或功能失效、寿命减短.

Do not use or leave the battery at high temperature (for example, at strong direct sunlight or in a vehicle in extremely hot weather). Otherwise, it can overheat or fire or its performance will be degenerate and its service life will be decreased.

IMR18650-1200mAh 产品规格书  
SPECIFICATIONS FOR IMR18650-1200mAh

- 禁止在强静电和强磁场的地方使用,否则易破坏电池安全保护装置,带来不安全的隐患。  
Do not use the battery in a location where static electricity and magnetic field is great, otherwise, the safety devices may be damaged, causing hidden trouble of safety.
- 如果电池发生泄露,电解液进入眼睛,请不要揉擦,应用清水冲洗眼睛,并立即送医治疗,否则会伤害眼睛。  
If the battery leaks, and the electrolyte get into the eyes, do not rub the eyes, instead, rinse the eyes with clean water, and immediately seek medical attention. Otherwise, it may injure eyes.  
如果电池发出异味,发热、变色、变形或使用、贮存、充电过程中出现任何异常,立即将电池从装置或充电器中移离并停用。  
If the battery gives off an odor, generates heat, becomes discolored or deformed, or in any way appear abnormal during use, recharging or storage, immediately remove it from the device or battery charger and stop using it.  
如果电极弄脏,使用前应用干布抹净,否则可能会导致接触不良功能失效  
In case the battery terminals are dirty, clean the terminals with a dry cloth before use. Otherwise performance may occur due to the poor connection with the instrument.
- 废弃之电池应用绝缘纸包住电极,以防起火、爆炸。  
Be aware discarded batteries may cause fire or explosion, tape the battery terminals to insulate them.